



**OFFICE OF THE COLLECTOR & DISTRICT MAGISTRATE, KENDRAPARA
(EMERGENCY SECTION)**

Email: deoc.kendrapada@gmail.com

Tel: 06727-232803

No. XXVIIIIF-10/2024 187 /Emgy. Dated. 13.02.2024

TENDER CALL NOTICE

Sealed quotations are invited from intending person /Agencies/ Supplier having valid TIN for construction/ installation of 28 nos. of Tsunami Signages in 4 nos. of villages of Rajnagar and Mahakalpara block to make Coastal Communities resilient against Tsunami, as a part of Odisha Tsunami Preparedness Programme (OTPP). The work detail information on the construction/ installation of Tsunami Signages, Term & Condition, Design, Evaluation Form and Financial Bid are at given at Annexure-A, B, C, D, E, F & G

SCHEDULE OF EVENT	
Last date of receipt of sealed quotation	19-02-2024 (by 05.00PM)
Opening of quotations	20-02-2024 at 3.00PM

The evaluation forms and formats of quotation completed in all respect must be sealed cover super scribed as "**Construction/ installation of Tsunami Signages**" addressed to **Collector, Kendrapara** should be reached at **District Emergency Operation Center, Collectorate, Kendrapara through Speed Post/ Registered Post/ Courier by 5.00PM of 19.02.2024** and shall be opened on **20.02.2024 at 3.00PM in the Chamber of Additional District Magistrate (Rev), Kendrapara**. No tenders will be received after due date and time.

The undersigned reserves the rights to accept/ modify/ reject any or all the quotation(s) fully or partially without assigning any reason thereof.

Yours faithfully,


Collector & District Magistrate
KENDRAPARA

Memo No. 188 / Dated 13.02.2024

Copy forwarded to the DIO, NIC, Kendrapara for information with a request to host the tender call notice in district website for wide publicity.


Collector & District Magistrate
KENDRAPARA

Memo No. 189 / Dated 13.02.2024

Copy to the DI & PRO, Kendrapara for information and necessary action.


Collector & District Magistrate
KENDRAPARA

Memo No. 190 / Dated 13.02.2024

Copy to the all members of Tender committee for information and necessary action and they are requested to attend above tender committee meeting at Collectorate, Kendrapara on 20.02.2024 at 03.00PM in the Chamber of Additional District Magistrate (Rev), Kendrapara.


Collector & District Magistrate
KENDRAPARA

Work Details

SI No.	Description	Design & Dimension	Nos. of Signage to be installed																																																												
1	<p>Providing and erecting direction and place identification retro-reflectorized sign(Single side) as per IRC:67 made of high intensity grade sheeting vide clause 801.3, fixed over aluminum sheeting 4 mm thick with area not exceeding 0.9 sqm supported on frame made out of 40NB SS pipe main frame, 20mm SS square pipe back support frame one no.80NB SS pipe post firmly fixed to the ground by means of properly designed foundation with M-20 grade cement concrete 45X45X75 cm, 60 cm below ground level as per approved drawing.</p> <table border="1"> <thead> <tr> <th>Description</th> <th>Unit</th> <th>Quantity</th> </tr> </thead> <tbody> <tr> <td>Unit=sqm</td> <td></td> <td></td> </tr> <tr> <td>Taking output=2.23sqm(6X4)</td> <td></td> <td></td> </tr> <tr> <td>I) Excavation for foundation</td> <td>cum</td> <td>0.240</td> </tr> <tr> <td>ii) Cement concrete M-20 grade (fdn.)</td> <td>Cum</td> <td>0.300</td> </tr> <tr> <td>a) Labour (for fixing at site)</td> <td></td> <td></td> </tr> <tr> <td>Mate</td> <td>day</td> <td>0.010</td> </tr> <tr> <td>Mazdoor</td> <td>day</td> <td>0.300</td> </tr> <tr> <td>B) Material</td> <td></td> <td></td> </tr> <tr> <td>20NB SS square pipe back support frame 6.14mtr @1.14kg/mtr</td> <td>Kg</td> <td>7.000</td> </tr> <tr> <td>40NB SS pipe main frame 13.27mtr @ 2.41kg/mtr</td> <td>Kg</td> <td>32.000</td> </tr> <tr> <td>80NB SS pipe post with top cover 8.54 mtr @ 3.08kg/mtr</td> <td>Kg</td> <td>26.303</td> </tr> <tr> <td></td> <td></td> <td>65.303</td> </tr> <tr> <td>Westage @ 5%</td> <td>Kg</td> <td>3.265</td> </tr> <tr> <td>Total</td> <td>Kg</td> <td>68.568</td> </tr> <tr> <td>Aluminium sheeting fixed with encapsulated lens type reflective sheeting size 2.23 sqm</td> <td>sqm</td> <td>2.230</td> </tr> <tr> <td>Add 2 percent of cost of materials for drilling holes, nuts, bolts, fabrication etc.</td> <td></td> <td>37551.875</td> </tr> <tr> <td>Cost of lettering</td> <td>LS</td> <td>1.00</td> </tr> <tr> <td>b) Machinery</td> <td></td> <td></td> </tr> <tr> <td>Tractor-trolley</td> <td>Hour</td> <td>0.020</td> </tr> </tbody> </table>	Description	Unit	Quantity	Unit=sqm			Taking output=2.23sqm(6X4)			I) Excavation for foundation	cum	0.240	ii) Cement concrete M-20 grade (fdn.)	Cum	0.300	a) Labour (for fixing at site)			Mate	day	0.010	Mazdoor	day	0.300	B) Material			20NB SS square pipe back support frame 6.14mtr @1.14kg/mtr	Kg	7.000	40NB SS pipe main frame 13.27mtr @ 2.41kg/mtr	Kg	32.000	80NB SS pipe post with top cover 8.54 mtr @ 3.08kg/mtr	Kg	26.303			65.303	Westage @ 5%	Kg	3.265	Total	Kg	68.568	Aluminium sheeting fixed with encapsulated lens type reflective sheeting size 2.23 sqm	sqm	2.230	Add 2 percent of cost of materials for drilling holes, nuts, bolts, fabrication etc.		37551.875	Cost of lettering	LS	1.00	b) Machinery			Tractor-trolley	Hour	0.020	Annexure-C & (6ftX4ft)	4
Description	Unit	Quantity																																																													
Unit=sqm																																																															
Taking output=2.23sqm(6X4)																																																															
I) Excavation for foundation	cum	0.240																																																													
ii) Cement concrete M-20 grade (fdn.)	Cum	0.300																																																													
a) Labour (for fixing at site)																																																															
Mate	day	0.010																																																													
Mazdoor	day	0.300																																																													
B) Material																																																															
20NB SS square pipe back support frame 6.14mtr @1.14kg/mtr	Kg	7.000																																																													
40NB SS pipe main frame 13.27mtr @ 2.41kg/mtr	Kg	32.000																																																													
80NB SS pipe post with top cover 8.54 mtr @ 3.08kg/mtr	Kg	26.303																																																													
		65.303																																																													
Westage @ 5%	Kg	3.265																																																													
Total	Kg	68.568																																																													
Aluminium sheeting fixed with encapsulated lens type reflective sheeting size 2.23 sqm	sqm	2.230																																																													
Add 2 percent of cost of materials for drilling holes, nuts, bolts, fabrication etc.		37551.875																																																													
Cost of lettering	LS	1.00																																																													
b) Machinery																																																															
Tractor-trolley	Hour	0.020																																																													
2	<p>Providing and erecting direction and place identification retro-reflectorized sign(Single side) as per IRC:67 made of high intensity grade sheeting vide clause 801.3, fixed over aluminum sheeting 4 mm thick with area more than 0.9sqm supported on frame made out of 40NB SS pipe main frame, 20mm SS square pipe back support frame two no.80NB SS pipe post firmly fixed to the ground by means of properly designed foundation with M-20 grade cement concrete 45X45X75 cm, 60 cm below ground level as per approved drawing.</p> <table border="1"> <thead> <tr> <th>Description</th> <th>Unit</th> <th>Quantity</th> </tr> </thead> <tbody> <tr> <td>Unit=sqm</td> <td></td> <td></td> </tr> <tr> <td>Taking output=0.56sqm(2X3)</td> <td></td> <td></td> </tr> <tr> <td>I) Excavation for foundation</td> <td>cum</td> <td>0.240</td> </tr> <tr> <td>ii) Cement concrete M-20 grade (Fdn.)</td> <td>Cum</td> <td>0.300</td> </tr> <tr> <td>a) Labour (for fixing at site)</td> <td></td> <td></td> </tr> <tr> <td>Mate</td> <td>day</td> <td>0.010</td> </tr> <tr> <td>Mazdoor</td> <td>day</td> <td>0.200</td> </tr> <tr> <td>B) Material</td> <td></td> <td></td> </tr> <tr> <td>80NB SS pipe post with top cover 3.36 mtr @ 3.08kg/mtr</td> <td>Kg</td> <td>10.349</td> </tr> <tr> <td>20NB SS square pipe back support frame 2.44mtr @1.14kg/mtr</td> <td>Kg</td> <td>2.780</td> </tr> <tr> <td></td> <td></td> <td>2.780</td> </tr> <tr> <td>Westage @ 5%</td> <td>Kg</td> <td>0.139</td> </tr> <tr> <td>Total</td> <td>Kg</td> <td>2.919</td> </tr> <tr> <td>Aluminium sheeting fixed with encapsulated lens type reflective sheeting size 0.56 sqm</td> <td>sqm</td> <td>0.560</td> </tr> <tr> <td>Add 2 percent of cost of materials for drilling holes, nuts, bolts, fabrication etc.</td> <td></td> <td>4854.08</td> </tr> <tr> <td>Cost of lettering</td> <td>LS</td> <td>1.00</td> </tr> <tr> <td>b) Machinery</td> <td></td> <td></td> </tr> <tr> <td>Tractor-trolley</td> <td>Hour</td> <td>0.020</td> </tr> </tbody> </table>	Description	Unit	Quantity	Unit=sqm			Taking output=0.56sqm(2X3)			I) Excavation for foundation	cum	0.240	ii) Cement concrete M-20 grade (Fdn.)	Cum	0.300	a) Labour (for fixing at site)			Mate	day	0.010	Mazdoor	day	0.200	B) Material			80NB SS pipe post with top cover 3.36 mtr @ 3.08kg/mtr	Kg	10.349	20NB SS square pipe back support frame 2.44mtr @1.14kg/mtr	Kg	2.780			2.780	Westage @ 5%	Kg	0.139	Total	Kg	2.919	Aluminium sheeting fixed with encapsulated lens type reflective sheeting size 0.56 sqm	sqm	0.560	Add 2 percent of cost of materials for drilling holes, nuts, bolts, fabrication etc.		4854.08	Cost of lettering	LS	1.00	b) Machinery			Tractor-trolley	Hour	0.020	Annexure-D & (2ftX3ft)	20			
Description	Unit	Quantity																																																													
Unit=sqm																																																															
Taking output=0.56sqm(2X3)																																																															
I) Excavation for foundation	cum	0.240																																																													
ii) Cement concrete M-20 grade (Fdn.)	Cum	0.300																																																													
a) Labour (for fixing at site)																																																															
Mate	day	0.010																																																													
Mazdoor	day	0.200																																																													
B) Material																																																															
80NB SS pipe post with top cover 3.36 mtr @ 3.08kg/mtr	Kg	10.349																																																													
20NB SS square pipe back support frame 2.44mtr @1.14kg/mtr	Kg	2.780																																																													
		2.780																																																													
Westage @ 5%	Kg	0.139																																																													
Total	Kg	2.919																																																													
Aluminium sheeting fixed with encapsulated lens type reflective sheeting size 0.56 sqm	sqm	0.560																																																													
Add 2 percent of cost of materials for drilling holes, nuts, bolts, fabrication etc.		4854.08																																																													
Cost of lettering	LS	1.00																																																													
b) Machinery																																																															
Tractor-trolley	Hour	0.020																																																													
3	<p>Providing and erecting direction and place identification retro-reflectorized sign(Single side) as per IRC:67 made of high intensity grade sheeting vide clause 801.3, fixed over aluminum sheeting 4 mm thick with area more than 0.9sqm supported on frame made out of 40NB SS pipe main frame, 20mm SS square pipe back support frame two no.80NB SS pipe post firmly fixed to the ground by means of properly designed foundation with M-20 grade cement concrete 45X45X75 cm, 60 cm below ground level as per approved drawing.</p> <table border="1"> <thead> <tr> <th>Description</th> <th>Unit</th> <th>Quantity</th> </tr> </thead> <tbody> <tr> <td>Unit=sqm</td> <td></td> <td></td> </tr> <tr> <td>Taking output=0.56sqm(2X3)</td> <td></td> <td></td> </tr> <tr> <td>I) Excavation for foundation</td> <td>cum</td> <td>0.240</td> </tr> <tr> <td>ii) Cement concrete M-20 grade (Fdn.)</td> <td>Cum</td> <td>0.300</td> </tr> <tr> <td>a) Labour (for fixing at site)</td> <td></td> <td></td> </tr> <tr> <td>Mate</td> <td>day</td> <td>0.010</td> </tr> <tr> <td>Mazdoor</td> <td>day</td> <td>0.200</td> </tr> <tr> <td>B) Material</td> <td></td> <td></td> </tr> <tr> <td>80NB SS pipe post with top cover 3.36 mtr @ 3.08kg/mtr</td> <td>Kg</td> <td>10.349</td> </tr> <tr> <td>20NB SS square pipe back support frame 2.44mtr @1.14kg/mtr</td> <td>Kg</td> <td>2.780</td> </tr> <tr> <td></td> <td></td> <td>2.780</td> </tr> <tr> <td>Westage @ 5%</td> <td>Kg</td> <td>0.139</td> </tr> <tr> <td>Total</td> <td>Kg</td> <td>2.919</td> </tr> <tr> <td>Aluminium sheeting fixed with encapsulated lens type reflective sheeting size 0.56 sqm</td> <td>sqm</td> <td>0.560</td> </tr> <tr> <td>Add 2 percent of cost of materials for drilling holes, nuts, bolts, fabrication etc.</td> <td></td> <td>4854.08</td> </tr> <tr> <td>Cost of lettering</td> <td>LS</td> <td>1.00</td> </tr> <tr> <td>b) Machinery</td> <td></td> <td></td> </tr> <tr> <td>Tractor-trolley</td> <td>Hour</td> <td>0.020</td> </tr> </tbody> </table>	Description	Unit	Quantity	Unit=sqm			Taking output=0.56sqm(2X3)			I) Excavation for foundation	cum	0.240	ii) Cement concrete M-20 grade (Fdn.)	Cum	0.300	a) Labour (for fixing at site)			Mate	day	0.010	Mazdoor	day	0.200	B) Material			80NB SS pipe post with top cover 3.36 mtr @ 3.08kg/mtr	Kg	10.349	20NB SS square pipe back support frame 2.44mtr @1.14kg/mtr	Kg	2.780			2.780	Westage @ 5%	Kg	0.139	Total	Kg	2.919	Aluminium sheeting fixed with encapsulated lens type reflective sheeting size 0.56 sqm	sqm	0.560	Add 2 percent of cost of materials for drilling holes, nuts, bolts, fabrication etc.		4854.08	Cost of lettering	LS	1.00	b) Machinery			Tractor-trolley	Hour	0.020	Annexure-E & (3ftX2ft)	4			
Description	Unit	Quantity																																																													
Unit=sqm																																																															
Taking output=0.56sqm(2X3)																																																															
I) Excavation for foundation	cum	0.240																																																													
ii) Cement concrete M-20 grade (Fdn.)	Cum	0.300																																																													
a) Labour (for fixing at site)																																																															
Mate	day	0.010																																																													
Mazdoor	day	0.200																																																													
B) Material																																																															
80NB SS pipe post with top cover 3.36 mtr @ 3.08kg/mtr	Kg	10.349																																																													
20NB SS square pipe back support frame 2.44mtr @1.14kg/mtr	Kg	2.780																																																													
		2.780																																																													
Westage @ 5%	Kg	0.139																																																													
Total	Kg	2.919																																																													
Aluminium sheeting fixed with encapsulated lens type reflective sheeting size 0.56 sqm	sqm	0.560																																																													
Add 2 percent of cost of materials for drilling holes, nuts, bolts, fabrication etc.		4854.08																																																													
Cost of lettering	LS	1.00																																																													
b) Machinery																																																															
Tractor-trolley	Hour	0.020																																																													

Annexure-B

Term & Condition

1. The civil structure and installation of hoarding in 4 nos. villages at selective places in Mahakalpara & Rajnagar block (**Kaitha & Chinchiri** of Rajnagar block and **Tantiapalsasan & Kantilo** of Mahakalpara block)
2. The bidder has to be completed the work within 15 days.
3. The Bidder shall furnish copy of the PAN Card & Aadhar Card
4. The Bidder shall submit the copy of GST Certificate.
5. The Bidders are required to deposit an earnest money of Rs.40,000/- (Rupees Forty thousand only) in shape of Demand Draft in favor of the "Collector Kendrapara". The E.M.D. amount of the unsuccessful Bidder will be refunded after completion of Quotation Process. And the bidders may obtain Tender paper by depositing Demand Draft of Rs 2000/- (Rupees Two Thousand only) in favor of Collector Kendrapara towards cost of Tender Papers (Non refundable).
6. The purchaser will evaluate and compare the quotations determined to be substantially responsive i.e., which (a) are properly signed and (b) confirm to the terms and conditions, and specifications. The quotations would be evaluated for all the items together given in the quotation format.
7. Each bidder shall submit only one quotation as per the enclosed quotation format
8. The rates quoted by the bidder shall be fixed for the duration of the contract and shall not be subject to adjustment on any account.
9. The transportation and installation charges are also be included in the bid price/ quoted price at site.
10. In case of any dispute the decision of the Collector, Kendrapara shall be final and binding


COLLECTOR
Collector & District Magistrate
KENDRAPARA

ଏହି ଅଞ୍ଚଳକୁ ସୁନାମା ପ୍ରବଣ ଅଞ୍ଚଳ ଭାବେ ଚିହ୍ନଟ କରାଯାଇଛି ।

TSUNAMI HAZARD ZONE

TSUNAMI EVACUATION MAP
JAYADEVKASABAPAHU VILLAGE

ସୁନାମା ଆସିବାର ଲକ୍ଷଣ:-

- ସମୁଦ୍ର କଳ ପଛକୁ ଘୁଞ୍ଚି ଯାଇ ସମୁଦ୍ର ଗର୍ଭସ୍ଥ ଗୋଡ଼ି, ବାଲି, ଇତ୍ୟାଦି ଦେଖାଯାଏ ।
- ସମୁଦ୍ର ବିଶାଳ ତରଙ୍ଗ ଉଚ୍ଚ ସ୍ତରରେ ଗର୍ଜନ କରିଥାଏ ।
- ସୁନାମା ଆସିବା ସମୟରେ ସମୁଦ୍ର କେନ୍ଦ୍ର ସାଧାରଣ କେନ୍ଦ୍ର ଠାରୁ ଅଧିକ ଉଚ୍ଚ ହୋଇଥାଏ ।

ସୁନାମାରୁ ପ୍ରରକ୍ଷା:-

- ସୁନାମା ଆସିବାର ସୂଚନା ପାଇବା ମାତ୍ରେ ତୁରନ୍ତ ଉପକୂଳ ଅଞ୍ଚଳକୁ ବିପରୀତ ଦିଗରେ ଦୂର କିଲୋମିଟରରୁ ଅଧିକ ଦୂର ସ୍ଥାନକୁ ଚାଲିଯାଆନ୍ତୁ ।
- ସମୁଦ୍ର କୂଳରେ ଥିବାବେଳେ ଯଦି ଭୂମିକମ୍ପ ଅନୁଭବ କରନ୍ତି ବା ସୁନାମାର ଲକ୍ଷଣ ଦେଖନ୍ତି ତେବେ ସତର୍କ ସୂଚନାକୁ ଅପେକ୍ଷା ନକରି ତୁରନ୍ତ ସୁରକ୍ଷିତ ସ୍ଥାନକୁ ଚାଲି ଯାଆନ୍ତୁ ।
- ଆଶ୍ରୟସ୍ଥଳକୁ ଯିବା ପାଇଁ ନିରାପଦ ରାସ୍ତାର ବ୍ୟବହାର କରନ୍ତୁ ।
- ସମୟ ଥିଲେ ନିଜର ଗୁରୁତ୍ୱପୂର୍ଣ୍ଣ ସାମଗ୍ରୀ ଓ ଜିନିଷପତ୍ର ନେଇ ଯାଆନ୍ତୁ ।
- ସୁନାମା ବିପଦ ଚଳିବା ପର୍ଯ୍ୟନ୍ତ ଆଶ୍ରୟସ୍ଥଳରେ ଅପେକ୍ଷା କରି ରୁହନ୍ତୁ ଓ ସ୍ଥାନୀୟ କର୍ତ୍ତୃପକ୍ଷଙ୍କ ସହ ଯୋଗାଯୋଗ କରନ୍ତୁ ।
- ସମୁଦ୍ର ମଧ୍ୟରେ ବୁଜାରେ ଥିଲେ କୂଳକୁ ନଆସି ଗଭୀର ସମୁଦ୍ର ମଧ୍ୟକୁ ଚାଲିଯାଆନ୍ତୁ । ନିକଟସ୍ଥ ପୋର୍ଟ କର୍ତ୍ତୃପକ୍ଷ, ପୋଷ୍ଟଗାର୍ଡ ବା ସ୍ଥାନୀୟ ପ୍ରଶାସନ ସହ ଯୋଗାଯୋଗ କରନ୍ତୁ ଏବଂ ବିଆଯାଇଥିବା

ଓଡ଼ିଶା ରାଜ୍ୟ ବିପର୍ଯ୍ୟୟ ପରିଚାଳନା କର୍ତ୍ତୃପକ୍ଷଙ୍କ ଦ୍ୱାରା ଜନହିତରେ ଭାରି ।


N.B: (Not to Scale)

Board size: 6 ft x 4 ft

Height : 10 ft from GL

Foundation(M20): 0.45 m x 0.45 m x 0.75 m


Sample

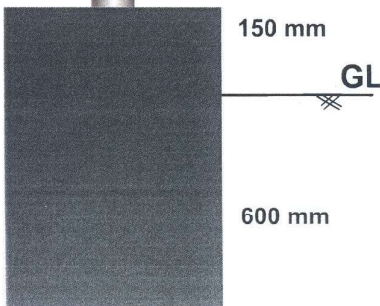

Handwritten signatures and dates:
 4.11.2021
 15.11.2021



N.B: (Not to Scale)
Board size: 2 ft x 3 ft
Height : 8 ft from GL
Foundation(M20):
0.45 m x 0.45 m x 0.75 m

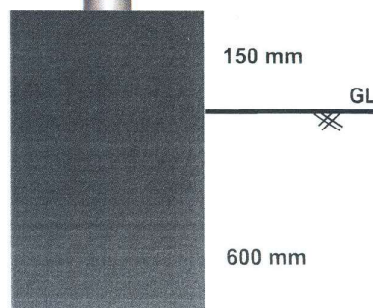

Handwritten signatures and notes:
- Top left: *DD*
- Middle left: *8-2*
- Bottom left: *HO*
- Middle left: *John*
- Bottom center: *4-2-2021*
- Bottom center: *15-11-2021*
- Middle right: *Jan*
- Far right: *AB*
- Bottom right: *Be*




N.B: (Not to Scale)

Board size: 3 ft x 2 ft

Height : 8 ft from GL

Foundation(M20):

0.45 m x 0.45 m x 0.75 m

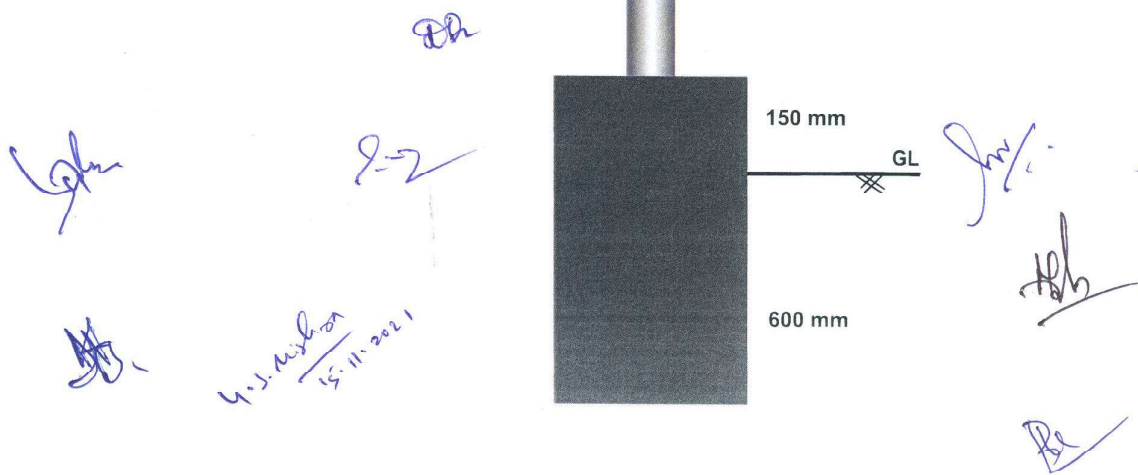

EVALUATION FORM

1	Name of the Supplier/Bidder		
2	Full Address	AT.	
		PO.	
		PS.	
		Dist.	
		PIN.	
3	Contact details (Mobile No.)		
4	Email ID		
5	Registration number of the firms with True copy		
6	Aadhar No. (With True Copy)		
7	GST Registration No. with place(Copy to be attached)		
8	Latest G.S.T return copy		
9	TIN/PAN No. (With True Copy)		
10	Up-to-date I.T. return (Copy to be attached)		
11	Rate quoted for Tsunami Signage (per unit) as per specification including all taxes and charges		

I do hereby certify that the above mentioned particulars are true and correct.

Full Signature of the Bidder with seal

DECLARATION

It is hereby declared that I/We the undersigned have read and examined all terms and conditions of the Bid document for which I/We have signed and submitted the bid under proper lawful power of attorney. It is also certified that all the terms and conditions of the bid document are fully acceptable to me/us and I/We will abide by the terms and conditions laid in the documents. This is also certified that our principal manufacturing firm has no objection in signing the purchase contract if the opportunity for the supply of the items against this tender is given to me/us.

Full Signature of the Bidder with seal

Annexure-G

FINANCIAL BID

- 1. Name & Address of the Firms/ Suppliers:**
- 2. Name of the proprietor of the Firm:**

Sl. No	Item Description	Specification	Nos. of units	Quoted price including all taxes		Remarks
				In Rs.	In figure	
1	Tsunami Information Board	6ftX4ft	04			
2	Tsunami Evacuation Route Signage Board	2ftX3ft	20			
3	Tsunami Safe Shelter Location Board	3ftX2ft	04			

Full Signature of the Bidder with seal